

# Multi- Aperture cores (2861014302)



Part Number: 2861014302

61 MULTI- APERTURE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

**Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

All multi- aperture cores are supplied burnished.

Our “Multi- Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

**For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

[Catalog Drawing](#)  
[3D Model](#)

Weight: 9.1 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	20.00	±0.4	0.787	—
B	12.7	±0.40	0.500	—
C	9.80	±0.25	0.386	—
E	10.25	±0.25	0.404	—
H	5.00	±0.2	0.197	—

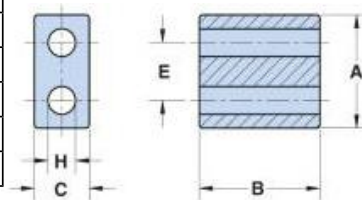


Figure 3

**Chart Legend**

+ Test frequency

Typical Impedance (Ω)	
100 MHz	149
250 MHz	213


Electrical Properties	
A <sub>L</sub> (nH)	350 Min

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A<sub>L</sub> value. The high frequency 67 material is controlled for A<sub>L</sub> value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

[Catalog Drawing](#)

Multi- aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for A<sub>L</sub> value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

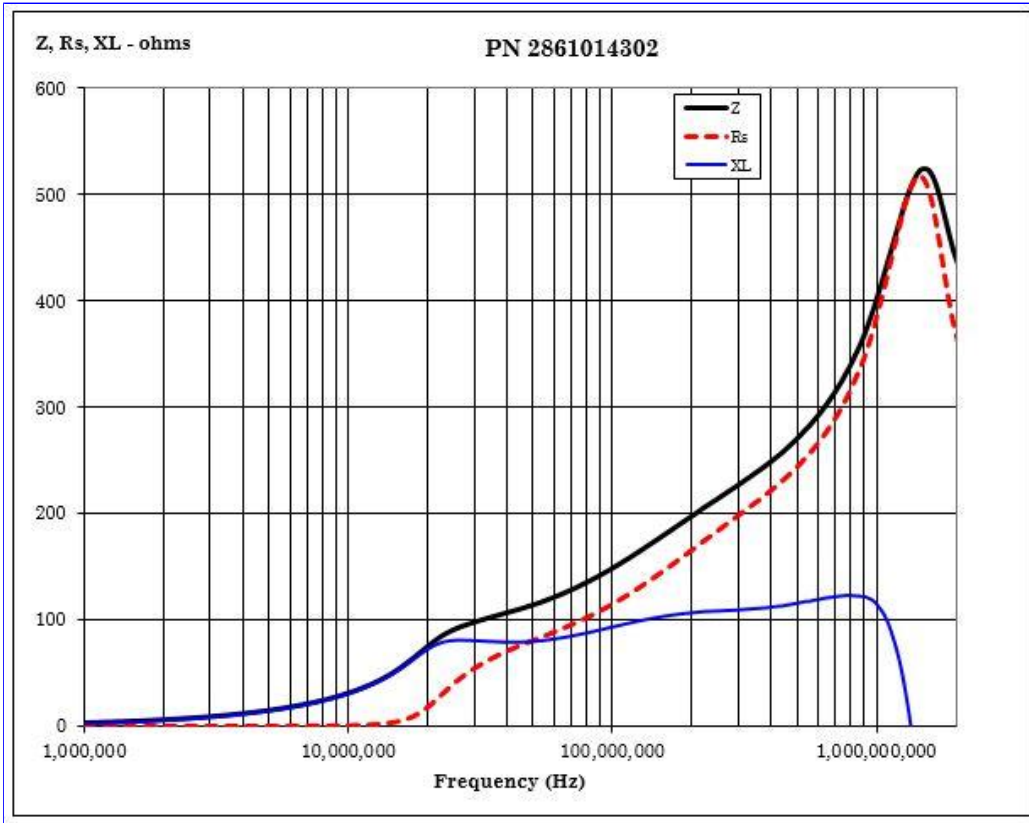

[CSV Download](#)