


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2644666611	~

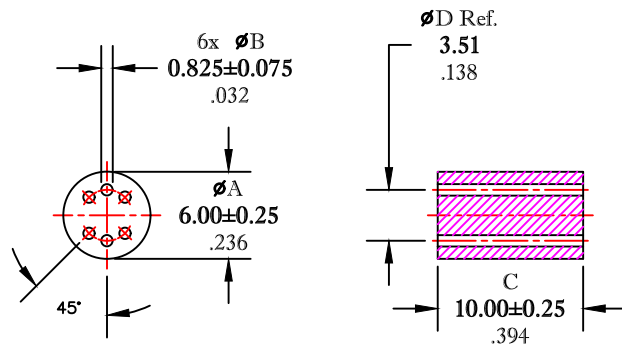


DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS


IMPEDANCE (OHMS)		
10 MHz	50 MHz	100 MHz
190 Min.	300 Min.	450 Min.

LEAD LENGTHS TRIMMED TO 1/2" FROM CORE
 TESTED WITH 1-1/2 TURNS OF #24 AWG



NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE VISUAL INSPECTION CRITERIA FOR MULTI-HOLE WOUND BEADS.
- 2 - BURNISH TO BREAK SHARP EDGES.
- 3 - RESISTIVITY $> 1 \times 10^8$ Ohm-cm.
- 4 - R_{dc} @ 500Vdc ACROSS "C" DIMENSION $> 4 \times 10^8$ Ohm-cm.
- 5 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE.
- 6 - IMPEDANCE MEASURED ON AN E4991A USING A 16092A TEST FIXTURE.

 FAIR-RITE PRODUCTS CORP.					
TITLE					
WOUND BEAD BLANK					
DRAWN BY	DATE	SIZE	PART NO.	REV.	
J.SERENCIS	06-29-2018	B	2644666611	~	
CHKD BY					
APPRVD BY		SCALE	NONE	SHEET 1 of 1	

FR# 44