


\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2644777711	~

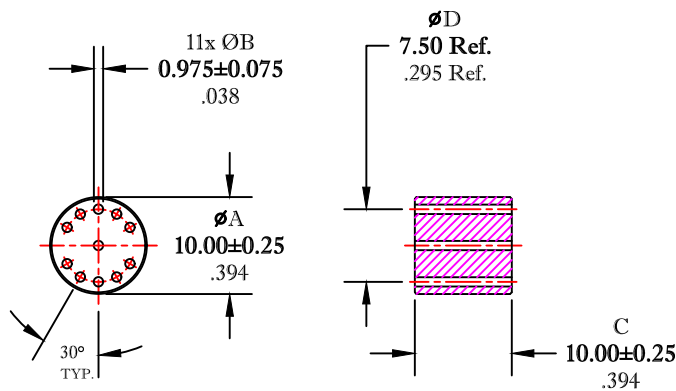


DIMENSIONS  
**BOLD NUMBERS ARE IN MILLIMETERS**  
 LIGHT NUMBERS ARE IN INCHES

### ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)		
10 MHz	50 MHz	100 MHz
280 Min.	740 Min.	800 Min.

LEAD LENGTHS TRIMMED TO 1/2" FROM CORE  
 2-1/2 TURNS WOUND AS SHOWN BELOW USING #22AWG.



#### NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE PRODUCTS CORP. VISUAL INSPECTION CRITERIA FOR GENERIC MULTI-HOLE WOUND BEADS.
- 2 - BURNISH TO BREAK SHARP EDGES.
- 3 -  $R_{dc} @ 10V_{dc}$  ACROSS "C" DIMENSION  $> 1.4 \times 10E8 \Omega cm$ .
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 FOR THERMAL SHOCK RESISTANCE.
- 5 - IMPEDANCE MEASURED ON AN E4991A USING A 16092A TEST FIXTURE.

FR# 44

<b>FAIR-RITE PRODUCTS CORP.</b>					
TITLE WOUND BEAD BLANK					
DRAWN BY J.SERENCSCS	DATE 06-29-2018	SIZE	PART NO.	REV.	
CHKD BY		B	2644777711	~	
APPRVD BY		SCALE	NONE	SHEET 1 of 1	