


\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2944666634	~

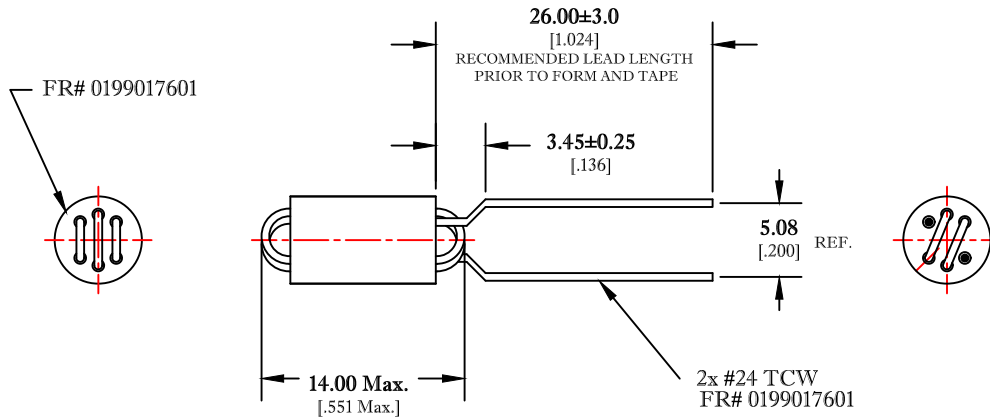

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)		
10 MHz	50 MHz	100 MHz
380 Min.	900 Min.	900 Min.

LEAD LENGTHS TRIMMED TO 1/2" FROM CORE  
TESTED WITH 3 TURNS #24 AWG

DIMENSIONS  
BOLD NUMBERS ARE IN MILLIMETERS  
LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE PRODUCTS CORP. VISUAL INSPECTION CRITERIA FOR GENERIC MULTI-HOLE WOUND BEADS.
- 2 - IMPEDANCE MEASURED ON AN E4991A USING A 16092A TEST FIXTURE.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE.
- 5 - WIRE LOOPS SHOULD BE UNIFORM IN LENGTH.
- 6 - THIS PART TO BE TAPED & REELED

FR# 44

FAIR-RITE PRODUCTS CORP.					
TITLE					
WOUND BEAD					
DRAWN BY	DATE	SIZE	PART NO.	REV.	
J.SERENCSICS	06-29-2018	B	2944666634	~	
CHKD BY		SCALE: NONE		SHEET 1 OF 1	
APPRVD BY					