


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2961666634	~

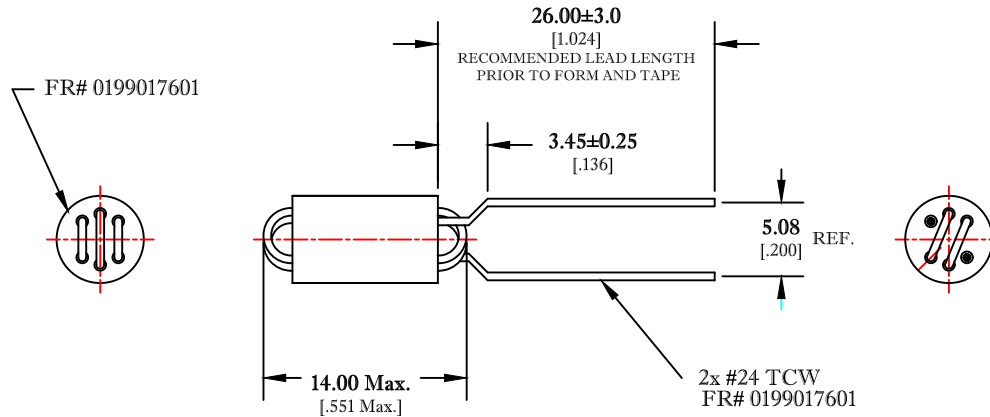

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)		
50 MHz	100 MHz	200 MHz
560 Min.	800 Min.	880 Min.

NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE VISUAL INSPECTION CRITERIA FOR GENERIC MULTI-HOLE WOUND BEADS.
- 2 - IMPEDANCE MEASURED ON A HP4191A USING A 16092A TEST FIXTURE, WITH FIXTURE COMPENSATION, AND WIRE LENGTH CUT TO **<6.35mm** [**<.250"**].
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER SOP# ELC-57.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE. ⁶
- 5 - RESISTIVITY > 1 X 10⁶ Ohms-cm, Rdc @ 10VDC, ACROSS "C" DIMENSION, > 4 X 10⁶ Ohms.
- 6 - WIRE LOOPS SHOULD BE UNIFORM IN LENGTH.
- 7 - THIS PART TO BE TAPED & REELED

FAIR-RITE PRODUCTS CORP.				
TITLE WOUND BEAD				
DRAWN BY J.SERENCSICS	DATE 06-29-2018	SIZE B	PART NO. 2961666634	REV. ~
CHKD BY				
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	

FR# 61