
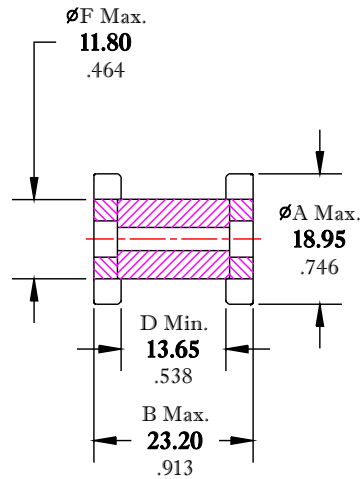


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

| | | |
|------|------------|------|
| SIZE | PART NO. | REV. |
| B | 9677182208 | ~ |

AFTER COATING

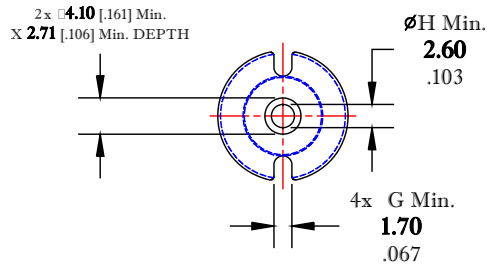

B Max. - B Min.
 ≤ 0.30
 $\leq .012$

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

| ELECTRICAL SPECIFICATIONS | |
|---|--------------|
| AL (nH) $\pm 10\%$ | AL (nH) Min. |
| 65 | 55 @ NI=410 |
| AL VALUE MEASURED @ 1 kHz, 1 Volt WITH N=95 #22 AWG @ 23°C | |

SEE SOP# ELC-33

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 9677182209.
- 2 - COATED BOBBIN TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 500 Vrms.
- 3 - COATING THICKNESS = 0.25mm [.010"] MAX.

FR# 77

| | | | | |
|---------------------------------|--------------------|---------------|------------------------|-----------|
| FAIR-RITE PRODUCTS CORP. | | | | |
| TITLE COATED BOBBIN | | | | |
| DRAWN BY J.SERENCSCS | DATE 07-03-2018 | SIZE B | PART NO. 9677182208 | REV. ~ |
| CHKD BY | | | | |
| APPRVD BY | | SCALE NONE | SHEET 1 of 1 | |