


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	9677242008	~

AFTER COATING

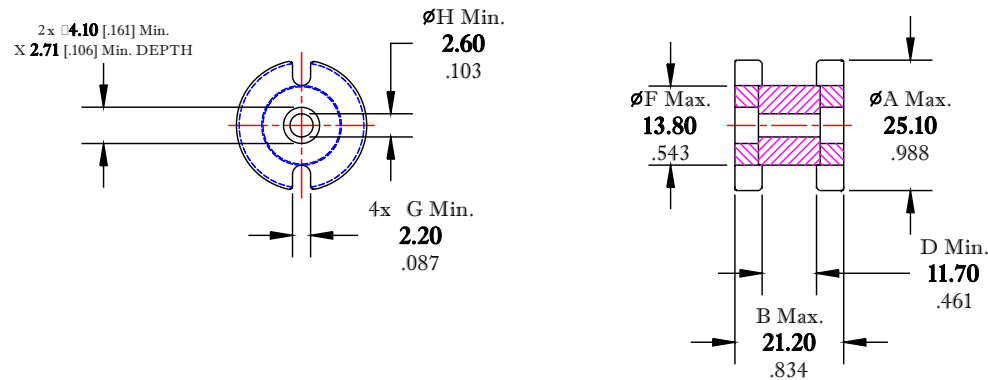

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS	
AL (nH) ±10%	AL (nH) Min.
88	75 @ NI=430
AL VALUE MEASURED @ 1 kHz, 1 Volt WITH N=50 #18 AWG @ 23°C	

SEE SOP# ELC-33

B Max. - B Min.
 ≤ 0.30
 ≤ .012

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 9677242009.
- 2 - COATED BOBBIN TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 500 Vrms.
- 3 - COATING THICKNESS = 0.25mm [.010"] MAX.

FR# 77

FAIR-RITE PRODUCTS CORP.				
TITLE				
COATED BOBBIN				
DRAWN BY	DATE	SIZE	PART NO.	REV.
J.SERENCSCS	07-03-2018	B	9677242008	~
CHKD BY				
APPRVD BY		SCALE	NONE	SHEET 1 of 1