


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	9677282008	~

AFTER COATING

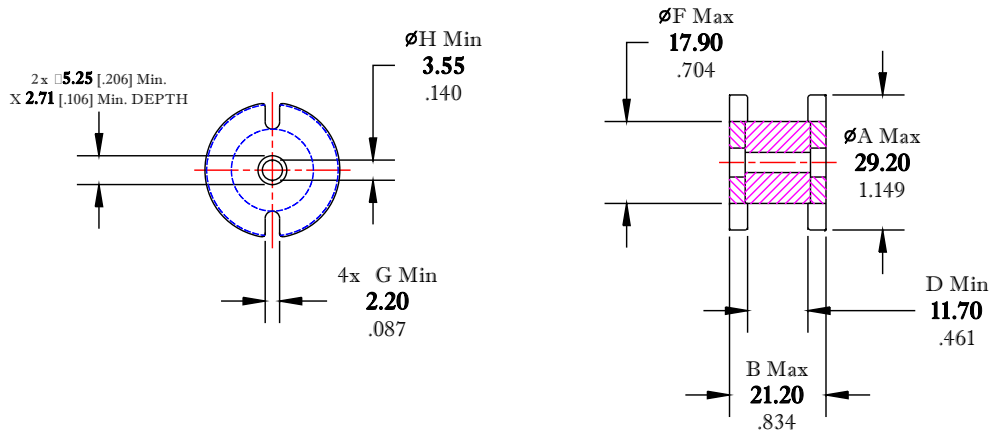

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

PRIMARY TEST METHOD	
AL (nH) ±10%	AL (nH) Min.
100	86 @ NI=470
AL VALUE MEASURED @ 1 kHz, 1 Volt WITH N=40 #18 AWG @ 23°C	

SEE SOP# ELC-33

ALTERNATE TEST METHOD	
AL (nH) ±10%	AL (nH) Min.
110	95 @ NI=470
AL VALUE MEASURED @ 1 kHz, 1 Volt WITH N=40 #18 AWG WOUND DIRECTLY ON BOBBIN	

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 9677282009.
- 2 - COATED BOBBIN TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 500 Vrms.
- 3 - COATING THICKNESS = 0.25mm [.010"] MAX.

FR# 77

FAIR-RITE PRODUCTS CORP.					
TITLE COATED BOBBIN					
DRAWN BY J.SERENCISCS	DATE 07-03-2018	SIZE	PART NO.	REV.	
CHKD BY		B	9677282008	~	
APPRVD BY		SCALE	NONE	SHEET 1 of 1	