


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2944778301	~

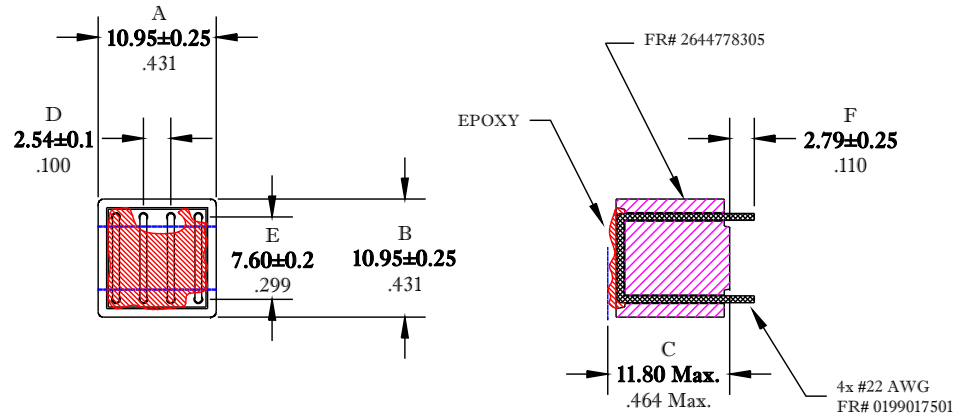

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

Impedance (Ohms)	
25 MHz	100 MHz
175 Min.	270 Min.

NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE VISUAL INSPECTION FOR GENERIC PC BEADS.
- 2 - IMPEDANCE MEASURED ON A HP4191A USING A 16092A TEST FIXTURE AT AN END WINDING.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 FOR THERMAL SHOCK RESISTANCE.
- 5 - EPOXY TO BE INSULCAST LN 15-16 WITH A MIX RATIO OF 1:1, OR APPROVED EQUIVALENT.

FR# 44

FAIR-RITE PRODUCTS CORP.				
TITLE .300 FOUR-LINE "PC" BEAD				
DRAWN BY J.SERENCIS	DATE 09-16-2018	SIZE B	PART NO. 2944778301	REV. ~
CHKD BY				
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	