
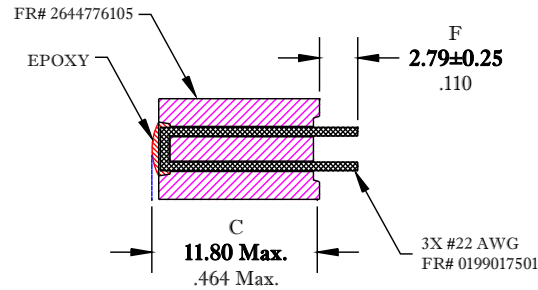


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2952776101	~

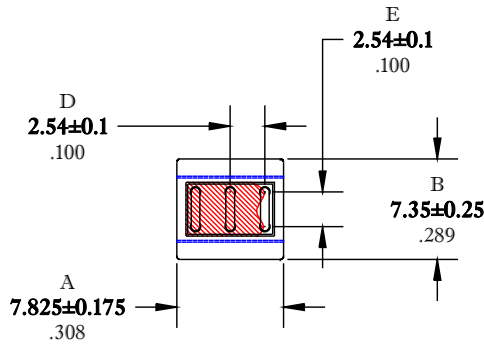

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

IMPEDANCE		
100 MHz	250 MHz	500 MHz
215 Min.	300 Min.	275 Min.

NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR GENERIC "PC" BEADS.
- 2 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 FOR THERMAL SHOCK RESISTANCE.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 4 - IMPEDANCE MEASURED ON A HP4191A USING A 16092A TEST FIXTURE AT AN END WINDING, WITH FIXTURE COMPENSATION.
- 5 - EPOXY TO BE INSULCAST LN 15-16 WITH A MIX RATIO OF 1:1, OR APPROVED EQUIVALENT

FR# 52

FAIR-RITE PRODUCTS CORP.				
TITLE .100 THREE-LINE PC BEAD				
DRAWN BY J.SERENCIS	DATE 06-29-2018	SIZE	PART NO.	REV.
CHKD BY		B	2952776101	~
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	