


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.



UNCONTROLLED ~CATALOG~ DRAWING

| | | |
|------|------------|------|
| SIZE | PART NO. | REV. |
| B | 2744065447 | ~ |



IMPEDANCE VALUES ARE MEASURED BETWEEN TERMINALS 1 AND 4, OR 2 AND 3, ON A HP4191A, USING A 16092A FIXTURE

| Impedance (Ohms) | | |
|------------------|----------|----------|
| 25 MHz | 100 MHz | 300 MHz |
| 116 Min. | 205 Min. | 252 Min. |

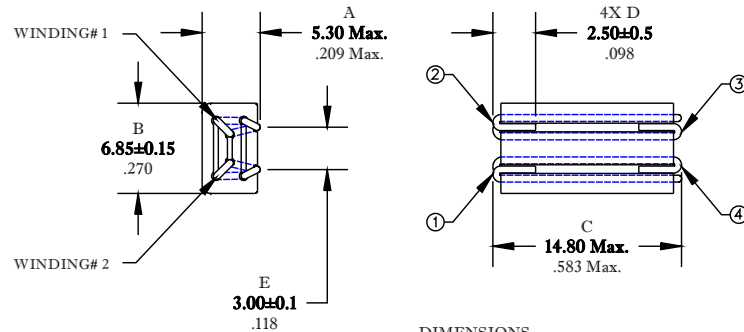

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - PARTS MEETS FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR SURFACE MOUNT BEADS.
- 2 - PARTS MEET FAIR-RITE PRODUCTS SOP# ELC-27, FOR THERMAL SHOCK RESISTANCE.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER SOP# ELC-57.
- 4 - COPLANARITY BETWEEN LEADS: **0.15mm** [.006"] Max.
- 5 - PARTS ARE SUPPLIED TAPED AND REELED PER IEC 60286-3 AND EIA 481 STANDARDS.
- 7 - PARTS ARE TO BE 100% TESTED & 100% CERTIFIED FOR BREAKDOWN VOLTAGE BETWEEN CONDUCTORS: 1000 Vdc.

| | | | | |
|-----------------------------------|--------------------|-------------|--------------|------|
| FAIR-RITE PRODUCTS CORP. | | | | |
| TITLE MULTI-TURN COMMON MODE BEAD | | | | |
| DRAWN BY J.SERENCISCS | DATE 06-29-2018 | SIZE | PART NO. | REV. |
| CHKD BY | | B | 2744065447 | ~ |
| APPRVD BY | | SCALE: NONE | SHEET 1 OF 1 | |

FR# 44