





\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2752051447	~

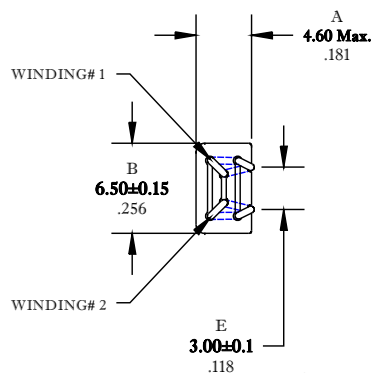

IMPEDANCE VALUES ARE MEASURED BETWEEN TERMINALS 1 AND 4, OR 2 AND 3, ON AN HP4191A, USING A 16092A TEST FIXTURE, WITH FIXTURE COMPENSATION

Impedance (Ohms)		
100 MHz	250 MHz	500 MHz
160 Min.	265 Min.	320 Min.

DIMENSIONS  
**BOLD NUMBERS ARE IN MILLIMETERS**  
 LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - PARTS MEETS FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR SURFACE MOUNT BEADS.
- 2 - PARTS MEET FAIR-RITE PRODUCTS SOP# ELC-27, FOR THERMAL SHOCK RESISTANCE.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 4 - COPLANARITY BETWEEN LEADS: 0.15mm [.006"] Max.
- 5 - PARTS ARE SUPPLIED TAPED AND REELED PER IEC 60286-3 AND EIA 481 STANDARDS.
- 6 - PARTS ARE TO BE 100% TESTED & 100% CERTIFIED FOR BREAKDOWN VOLTAGE BETWEEN CONDUCTORS: 1000 Vdc.

<b>FAIR-RITE PRODUCTS CORP.</b>				
TITLE MULTI-TURN COMMON MODE BEAD				
DRAWN BY J.SERENCISCS	DATE 06-29-2018	SIZE B	PART NO. 2752051447	REV. ~
CHKD BY				
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	

FR# 52