


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2944666634	~

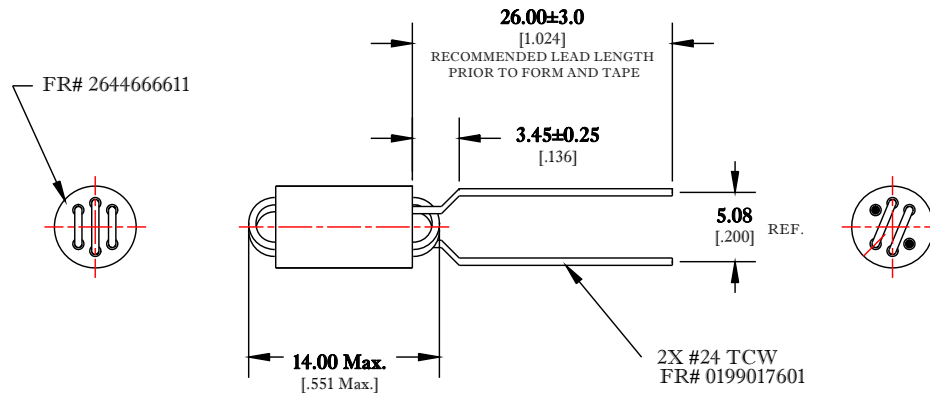

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)		
10 MHz	50 MHz	100 MHz
380 Min.	900 Min.	900 Min.

LEAD LENGTHS TRIMMED TO 1/2" FROM CORE
TESTED WITH 3 TURNS #24 AWG

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE PRODUCTS CORP. VISUAL INSPECTION CRITERIA FOR GENERIC MULTI-HOLE WOUND BEADS.
- 2 - IMPEDANCE MEASURED ON AN E4991A USING A 16092A TEST FIXTURE.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE.
- 5 - WIRE LOOPS SHOULD BE UNIFORM IN LENGTH.
- 6 - THIS PART TO BE TAPED & REELED

FR# 44

FAIR-RITE PRODUCTS CORP.				
TITLE WOUND BEAD				
DRAWN BY D. FOOTE	DATE 9/26/2019	SIZE B	PART NO. 2944666634	REV. ~
CHKD BY				
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	