


\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2961666634	~

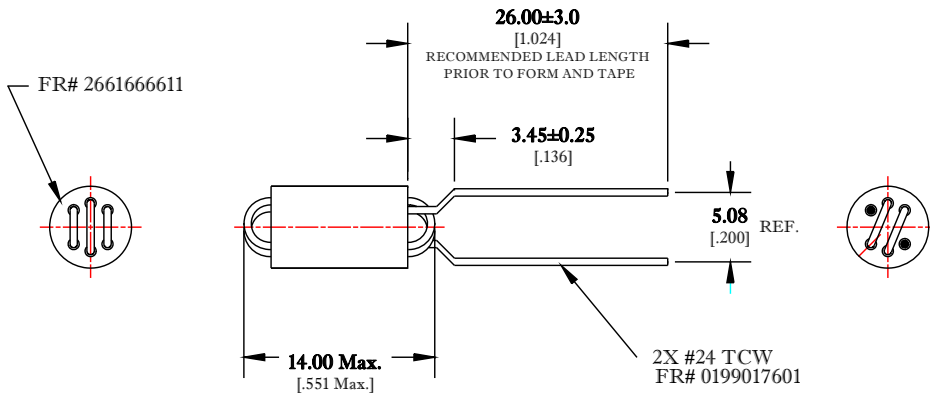

DIMENSIONS  
**BOLD NUMBERS ARE IN MILLIMETERS**  
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)		
50 MHz	100 MHz	200 MHz
560 Min.	800 Min.	880 Min.

NOTES:

- 1 - CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE VISUAL INSPECTION CRITERIA FOR GENERIC MULTI-HOLE WOUND BEADS.
- 2 - IMPEDANCE MEASURED ON A HP4191A USING A 16092A TEST FIXTURE, WITH FIXTURE COMPENSATION, AND WIRE LENGTH CUT TO <math><6.35\text{mm}</math> [ $<.250\text{''}</math>].$
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER SOP# ELC-57.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE.
- 5 - RESISTIVITY >  $1 \times 10^6$  Ohms-cm, Rdc @ 10VDC, ACROSS "C" DIMENSION, >  $4 \times 10^6$  Ohms.
- 6 - WIRE LOOPS SHOULD BE UNIFORM IN LENGTH.
- 7 - THIS PART TO BE TAPED & REELED

FAIR-RITE PRODUCTS CORP.				
TITLE				
WOUND BEAD				
DRAWN BY	DATE	SIZE	PART NO.	REV.
D. FOOTE	10/23/2019	B	2961666634	~
CHKD BY				
APPRVD BY		SCALE: NONE	SHEET 1 OF 1	

FR# 61