


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2661250402	~

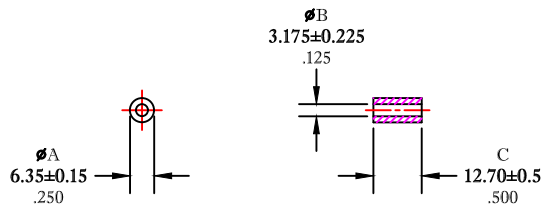

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS							
$\Sigma L/A(\text{mm}^{-1})$	$l_e(\text{mm})$	$A_e(\text{mm}^2)$	$V_e(\text{mm}^3)$	$L_o(\text{nH})$	IMPEDANCE (OHMS)		
					100 MHz	250 MHz	500 MHz
0.71374	13.8	19.4	267	1.761	68 Min.	92 Min.	108 Min.
N=1 #22AWG WL=1"							

NOTES:

- 1 - BURNISH TO BREAK SHARP EDGES.
- 2 - IMPEDANCE IS MEASURED ON AN HP4191A, USING A 16092A TEST FIXTURE, WITH FIXTURE COMPENSATION.

FR# 61

FAIR-RITE PRODUCTS CORP.					
TITLE SHIELD BEAD					
DRAWN BY J.SERENCIS	DATE 06-27-2018	SIZE B	PART NO. 2661250402	REV. ~	
CHKD BY					
APPRVD BY		SCALE NONE	SHEET 1 of 1		